5/8" STAINLESS STEEL LIFT BAR CAST INTO 4 5/8"x 1 1/2"x 2" DEEP PICK BAR SLOT.

(2)–ø5/8"x 2" LG S.S. HEX HEAD BOLTS. RUBBER GASKET AND S.S. WHASHER.

(4)–ø1" ANCHOR HOLES ON ø33.75" B.C.

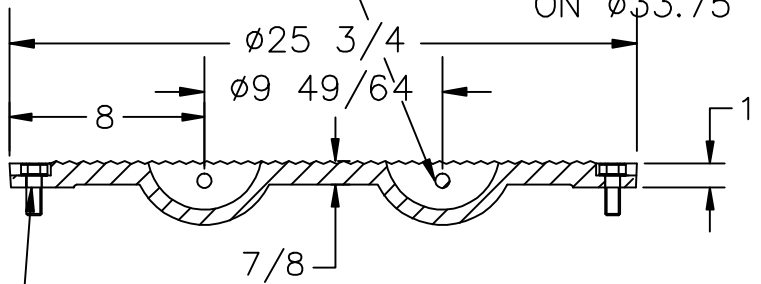

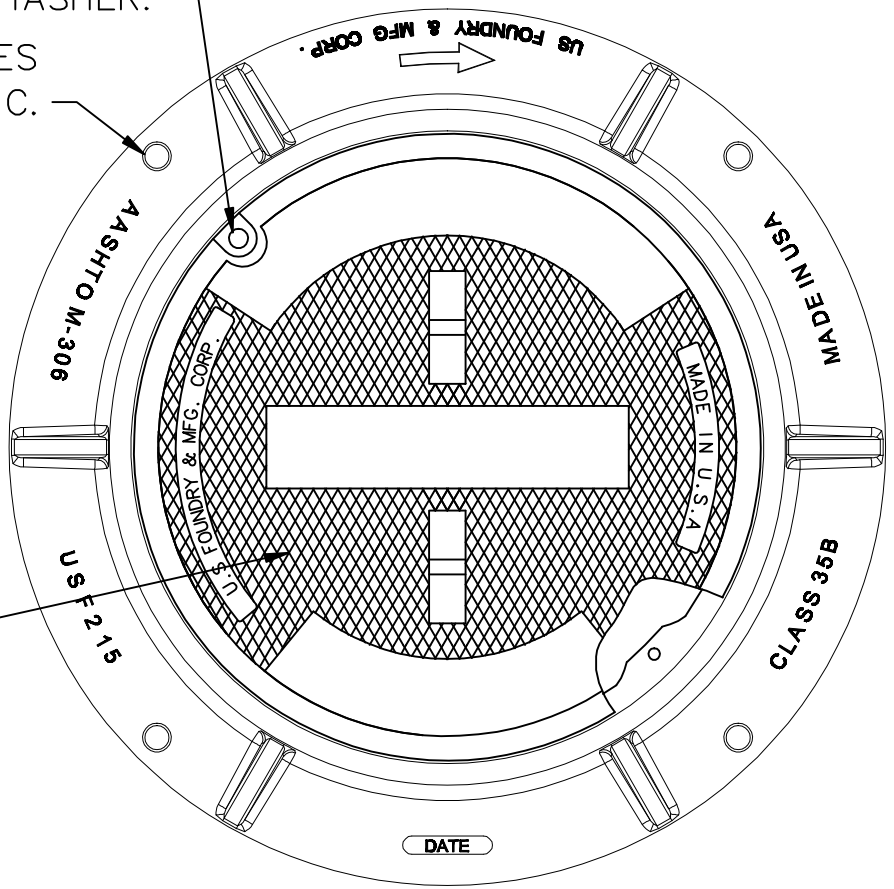

MACHINED SURFACE

DIAMOND TOP NON–SKID DESIGN

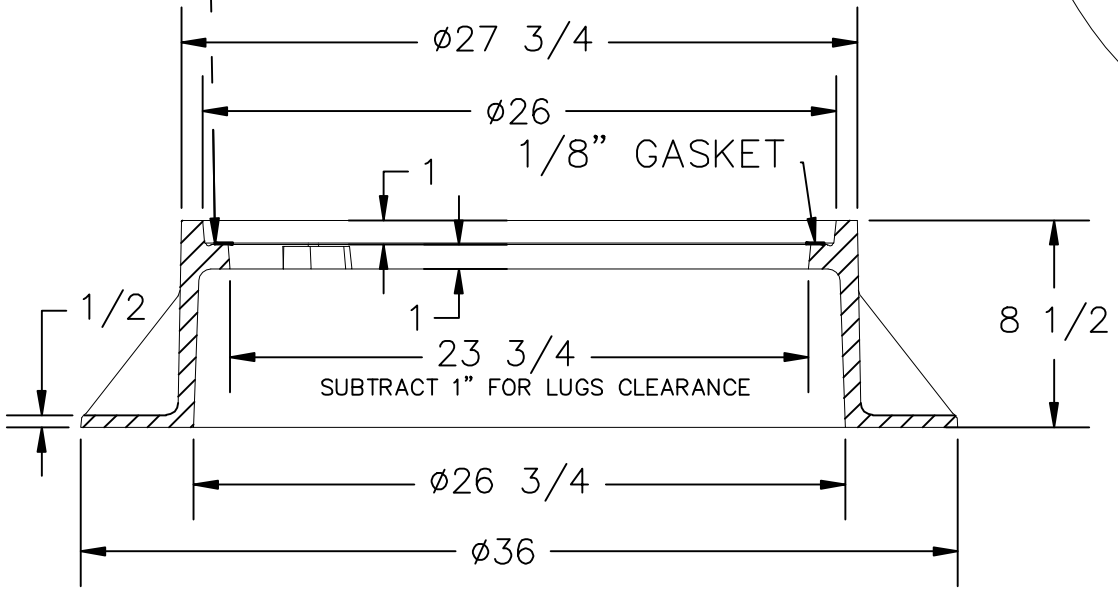

US FOUNDRY & MFG. CORP.
8351 NW 93rd Street, Medley, FL 33166-2025
ph: 1-800-432-9709; fax: 305-887-9429
www.usfoundry.com

© 2010 US Foundry & Mfg. Corp. All Rights Reserved

USF 215 RING & PW COVER BWT

LOAD CLASSIFICATION: Medium Duty				
MATERIAL: ASTM–A48 GRAY IRON CLASS35B				
Ring No:	8021083	WGHT:	235	SCALE: 1/8"=1"
Cover No:			130	DATE: 12–30–09
				DWN. BY: ULS
Assembly No:				
UNLESS OTHERWISE NOTED WEIGHT IS IN POUNDS AND APPROXIMATED				
REV:	DATE:	REV BY:		QUOTE#