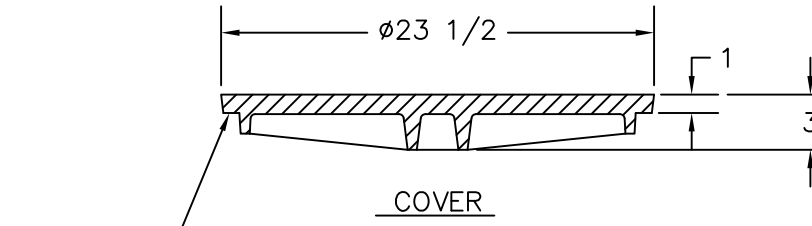

4–1" DIA. ANCHOR HOLES @ 90° O.C.

(2)– NON PENETRATING PICKHOLES.

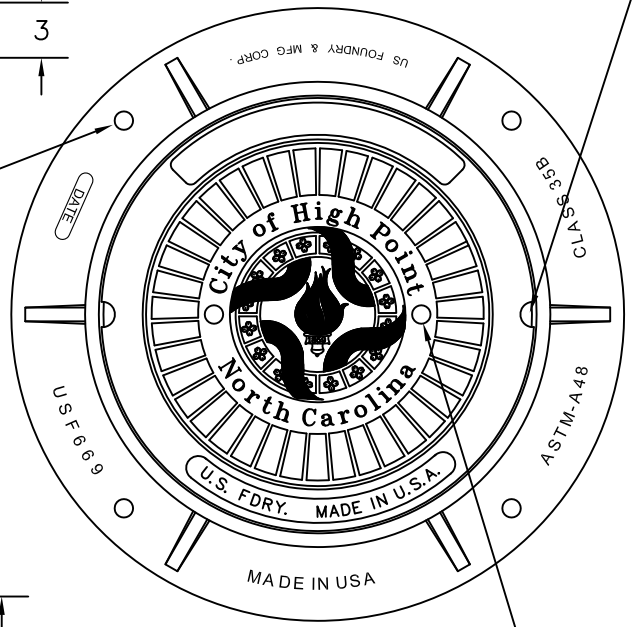

(2)– 1" DIA. VENT HOLES

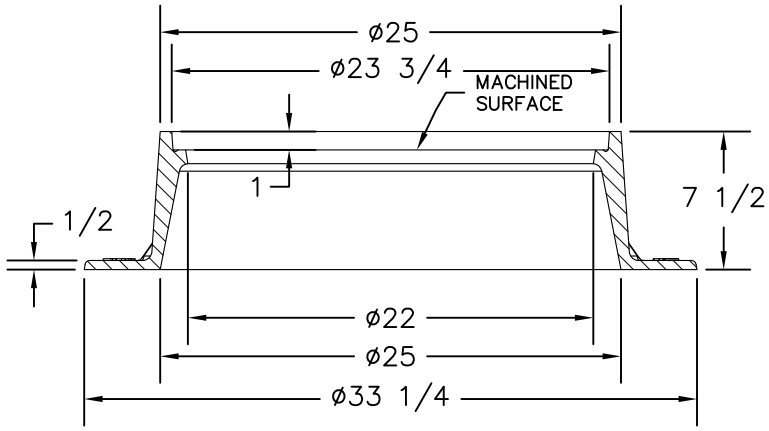

US FOUNDRY & MFG. CORP.
8351 NW 93rd Street, Medley, FL 33166-2025
ph: 1-800-432-9709; fax: 305-887-9429
www.usfoundry.com
© 2010 US Foundry & Mfg. Corp. All Rights Reserved

USF 669 RING & KY COVER

LOAD CLASSIFICATION: Heavy Duty				
MATERIAL: ASTM–A48 GRAY IRON CLASS35B				
Ring No:	8020009	WGHT:	190	SCALE: 1/8"=1"
Cover No:			125	DATE:
				DWN. BY: DBB
UNLESS OTHERWISE NOTED WEIGHT IS IN POUNDS AND APPROXIMATED				
REV:	DATE:	REV BY:		QUOTE#